

California Faucets®

INDUSTRIAL SINGLE HOLE FLOOR MOUNT TUB FILLER WITH HANDSHOWER

Descanso®

Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- No additional wall or trap stabilizer kit required
- Tub filler: Maximum flow rate: 10 gpm (37 L/min) at 60 psi
- Handshower: Flow rate: 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min)
- Ceramic mixing cartridge
- Rough valve sold separately (9511)

1011-XX.20  
1011-XX.18



1011-30.FR shown



XX = DENOTES  
HANDLE SERIES

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) / DOE (2.0 & 1.8 gpm)
- Commonwealth of MA
- ADA compliant (with lever handles)
- Local codes may require installation of an upstream tempering valve

DIMENSIONS, in./[mm]		
HANDLE OPTIONS	A	B
30	1 3/8" [79mm]	11 6/16" [171mm]
30F	1 3/8" [79mm]	11 6/16" [171mm]
30K	1 3/8" [79mm]	11 6/16" [171mm]
30X	1 1/2" [39mm]	5 1/4" [133mm]
30XF	1 1/2" [39mm]	5 1/4" [133mm]
30XK	1 1/2" [39mm]	5 1/4" [133mm]

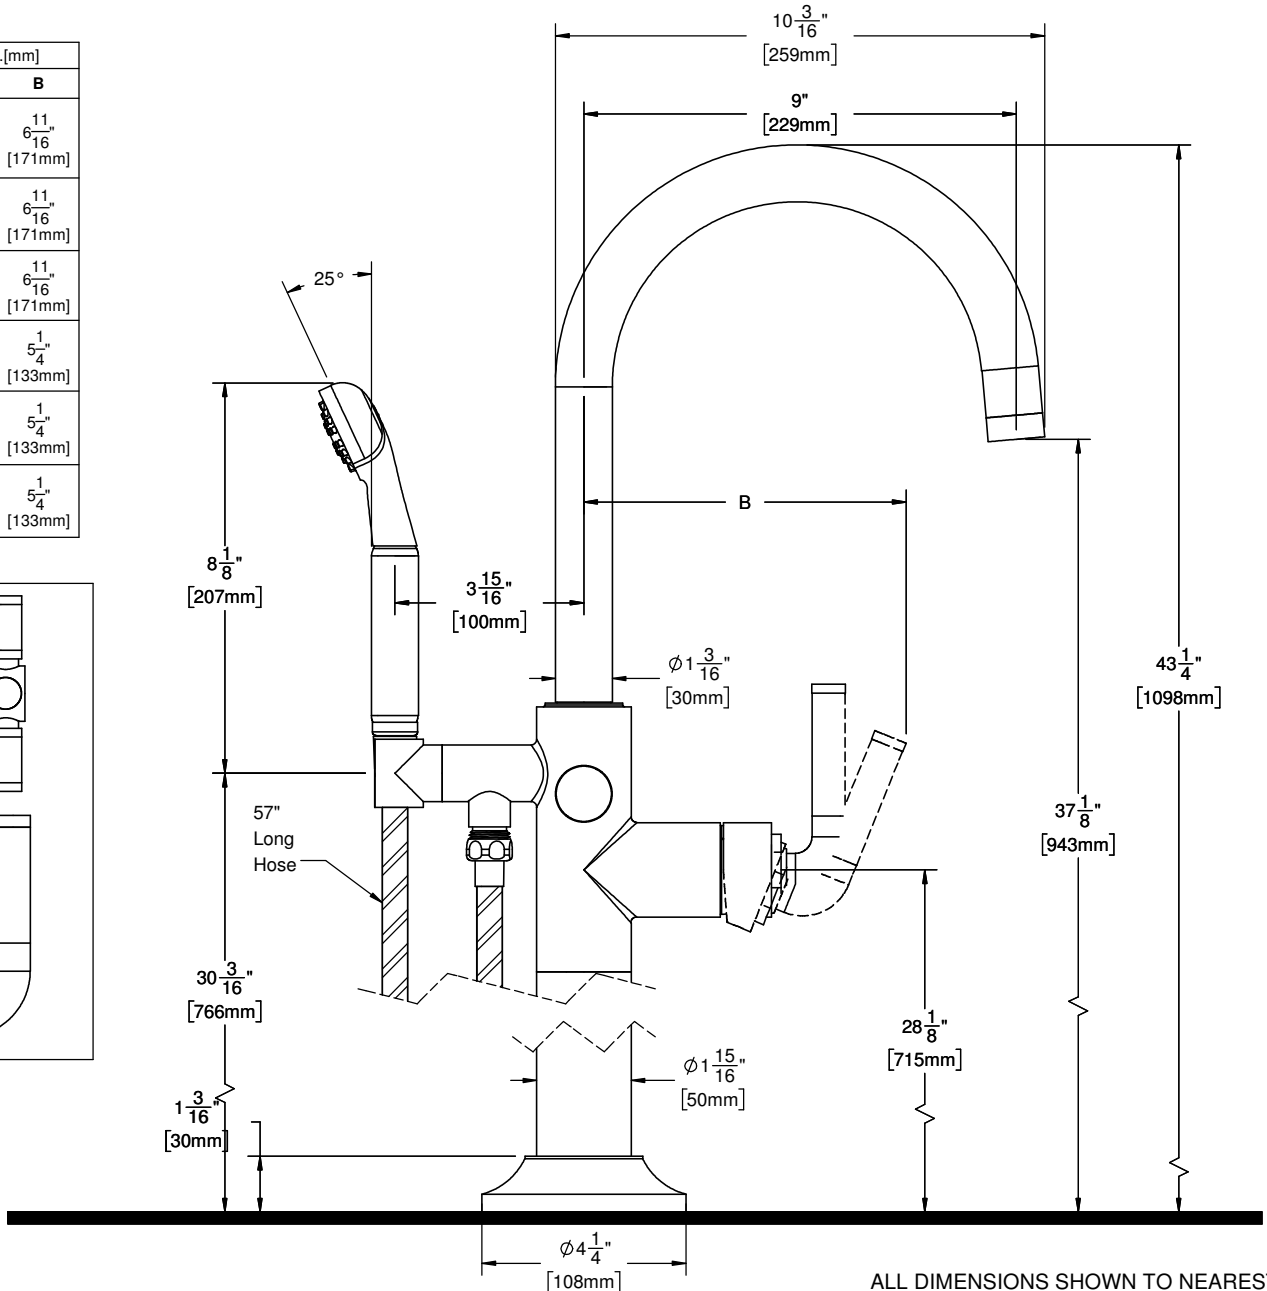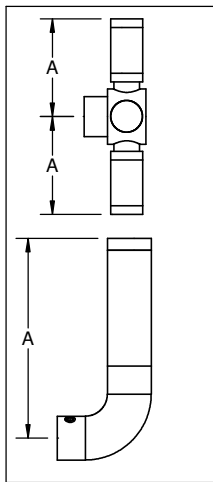

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"  
[ALL DIMENSIONS SHOWN TO NEAREST 1MM]